

Fluon+ mPEEK - 2000 Series Product Information

Description

Fluon+ mPEEK are a series of PEEK products which have been modified using AGC's proprietary fluoropolymer and compounding technology. The fluoropolymer modification improves the impact and wear resistance of the PEEK resin, as well as improving the physical and electrical properties.

Fluon+ mPEEK can be processed via conventional PEEK molding methods, such as extrusion or injection molding. Potential applications may be hose or tube, wire and cable, gears, sealing, or other markets where high temperature and chemical resistance are required

Material Features

- Impact resistance
- Wear resistance
- Flexibility
- Electrical performance
- Dimensional stability
- Chemical resistance

Applications

- **Extruded moldings**
 - Film for electrical insulation
 - Wire and cable
 - Tube
- **Injection moldings**
 - Gear member
 - Bearing retainer
 - Casing
 - Case body
- **Gaskets Cutting and processing**
 - Plate / Sheet
 - Round / Cylindrical bar

Processing

Fluon+ mPEEK can be processed via conventional PEEK molding techniques

- Extrusion molding
- Injection molding
- Pressure molding

Fluon+ mPEEK - 2000 Series Product Information

Fluon+ mPEEK Typical Properties

Property	Test Method	Units	PEEK (unannealed)	Modified PEEK Increasing Modification -->	
				KB-2020	KB-2030
Tensile Strength (23 °C)	ASTM D638	MPa	102	74	67
Tensile Elongation (23 °C)	ASTM D638	%	120	74	78
Flexural Strength (23 °C, 5% strain)	ASTM D790	MPa	148	109	83
Flexural Modulus (23 °C)	ASTM D790	GPa	3.6	3.0	2.2
Impact Strength (23 °C)	ASTM D256	J/m	65	208	NB
Impact Strength (-40 °C)	ASTM D256	J/m	55	79	87
MIT Flex Life	JIS P8115	Cycles	No Data	796	721

Chemical Resistance



Modified PEEK shows similar or better chemical resistance to PEEK

Fluid	Immersion Condition	Tensile Strength Retention (%)			Elongation Retention (%)		
		PEEK	KB-2020	KB-2030	PEEK	KB-2020	KB-2030
IRM-903	150 °C 3 Weeks	88	96	104	32	76	54
Diesel No. 2	150 °C 3 Weeks	92	101	106	21	33	94
Steam	260 °C 3 Weeks	97	106	112	36	54	108

Fluon+ mPEEK - 2000 Series Product Information

Wear Property Data



Loss of material during abrasion testing significantly reduced with the addition of fluoropolymer modification

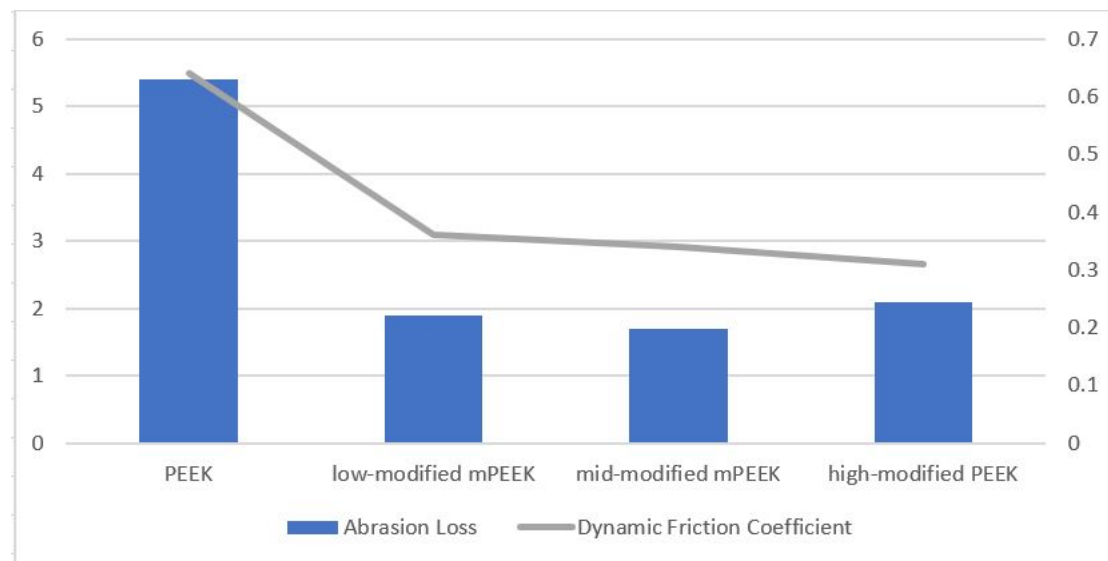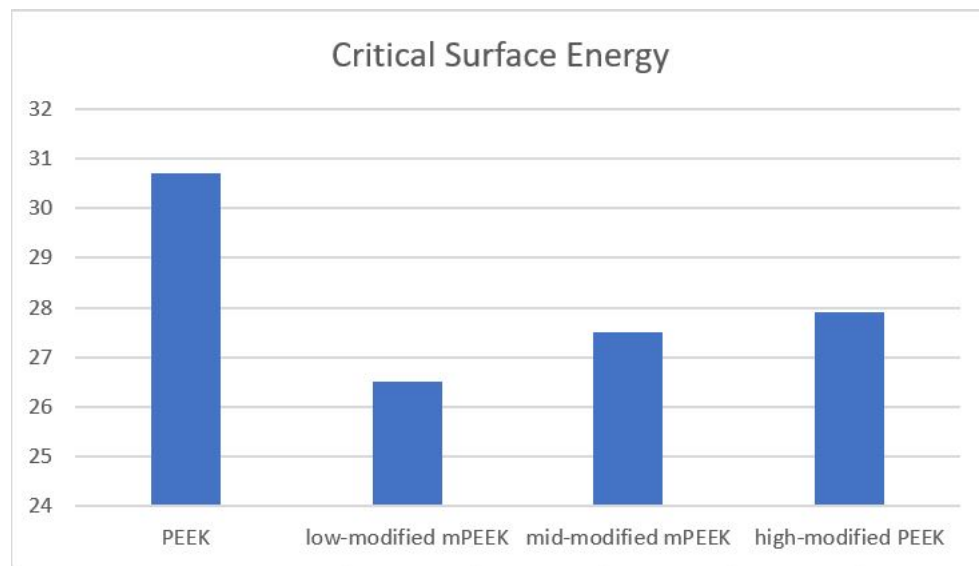

Fluon+ mPEEK - 2000 Series Product Information


Flexural Property Data

Flex resistance via MIT increased with fluoropolymer modification

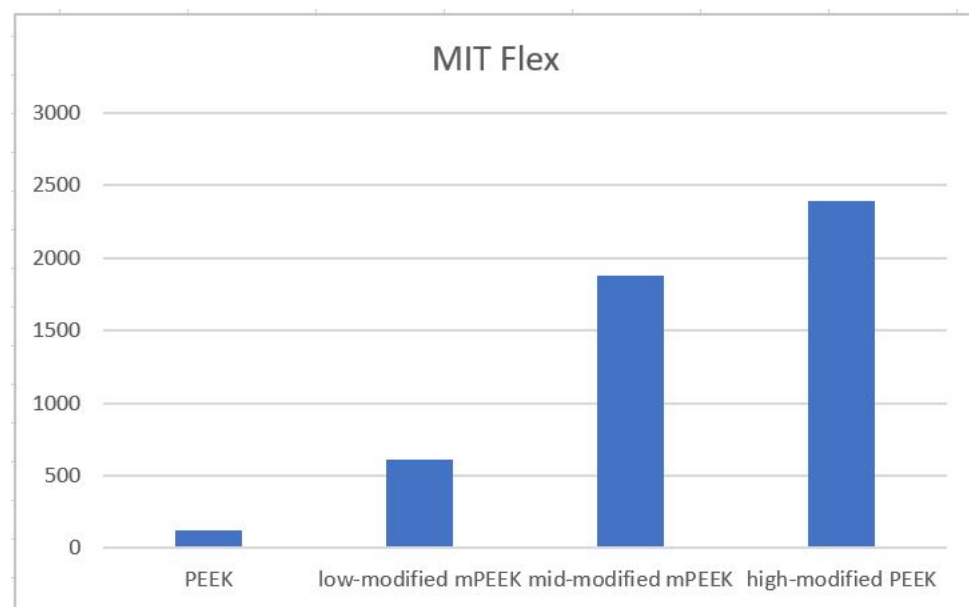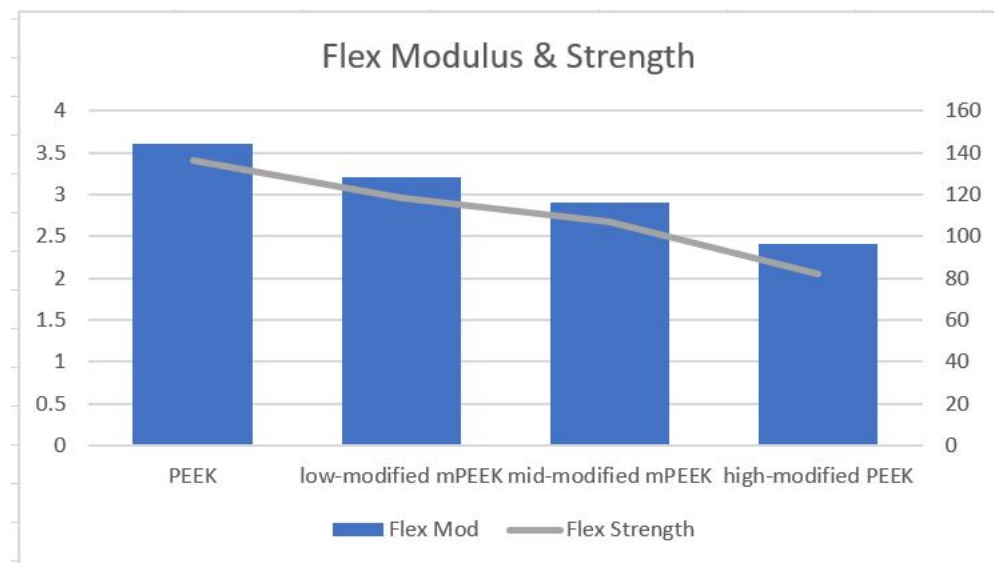


Fluon+ mPEEK - 2000 Series Product Information

Electrical Properties

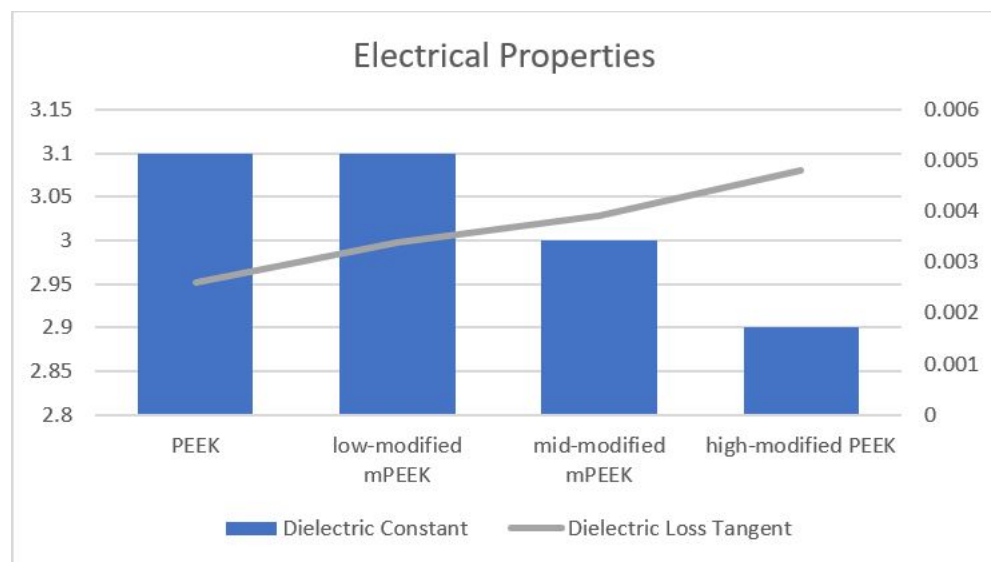


Tensile Properties

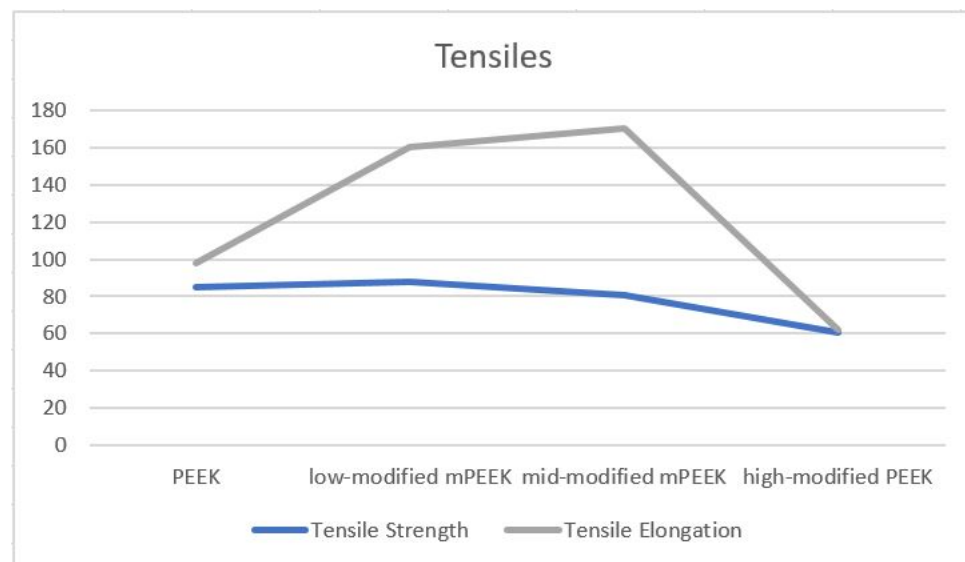

Fluon+ mPEEK - 2000 Series Product Information

Coefficient of Thermal Expansion

Dimensional stability across the operating temperature improved with fluoropolymer modification

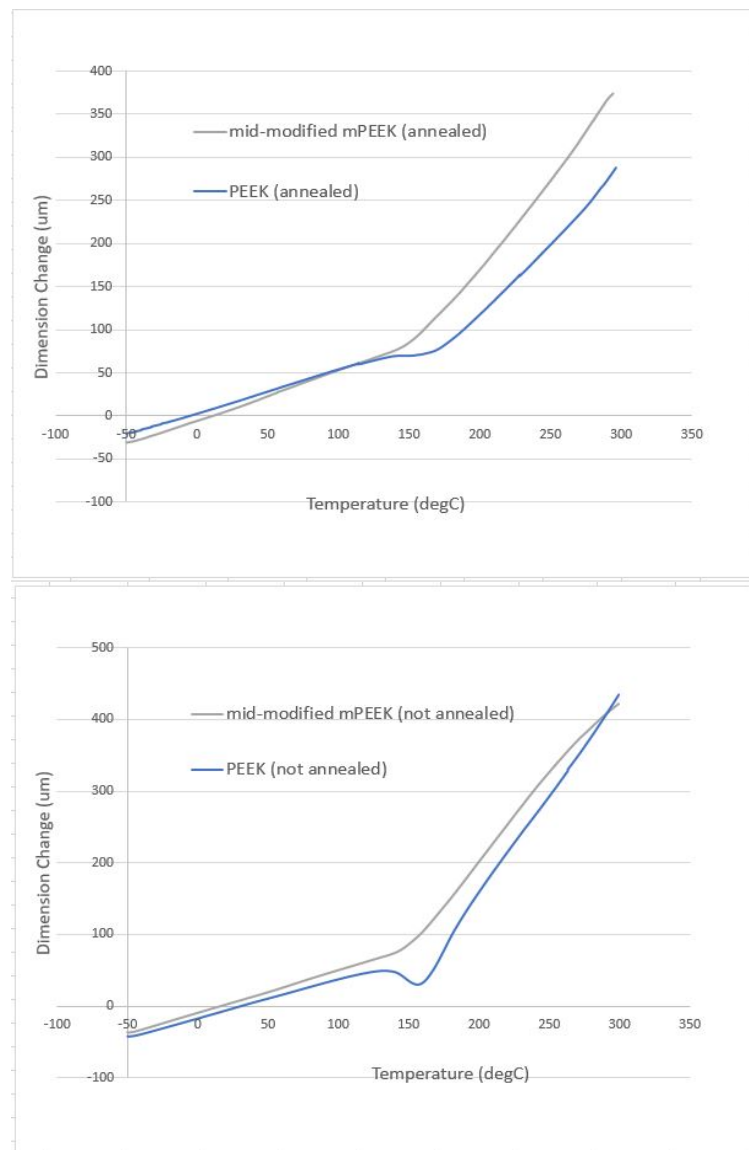



Fluon+ mPEEK - 2000 Series Product Information

Handling and Storage

Heating Fluon® products in excess of 750°F (399°C) can produce toxic fumes. It is, therefore, necessary to provide local exhaust ventilation in areas where Fluon® products are exposed to high temperatures. Avoid breathing fumes or contaminating smoking tobacco with fumes, powder, or dust.

Thermal decomposition of this product will generate hydrogen fluoride, which is corrosive. Corrosion resistance materials are required for prolonged contact with molten resin.

Fluon+ mPLASTICS products should be stored in their original containers. This will be either in re-sealable plastic pails, or in drums with the liner bags and chime rings securely re-fastened.

Products should be stored indoors at nominal conditions of 23 C and 50% relative humidity. Products should be dried prior to use.

Safe Handling Information

A summary of the hazards, as defined by OSHA Hazard Communication Standard, 29 CFR 1910.1200 for this product are:

Physical hazards: None

Health hazards: None

FOR ADDITIONAL INFORMATION AND HANDLING INSTRUCTIONS READ AGC CHEMICALS AMERICAS, INC. MATERIAL SAFETY DATA SHEET.

**AGC Chemicals Company
AGC Inc.**

Shin-Marunouchi Bldg.,
1-5-1 Marunouchi
Chiyoda-ku, Tokyo, 100-8405 Japan
Tel: +81-3-3218-5438
www.agc-chemicals.com

AGC Asia Pacific Pte., Ltd.

460 Alexandra Road, #32-01
PSA Bldg., Singapore, 119963
Tel: +65-6273-5656
www.agc-asiapacific.com

**AGC Chemicals Trading
(Shanghai) Co., Ltd.**

Room 4008/09, 40F, T1
Raffles City Changning
No. 1133 Changning Road
Shanghai, China 200051
Tel: +86-21-6386-2211
www.agcsh.com

**AGC Chemicals
(Thailand) Co., Ltd.**

24th Floor, Bangkok Insurance Bldg
25 South Sathorn Road
Kwang Tungmahamek Khet Sathorn
Bangkok 10120, Thailand
Tel: +66-2-679-1600
www.acth.co.th

AGC Chemicals Europe, Ltd.

PO Box 4, York House
Hillhouse International
Thornton, Cleveleys
Lancashire FY5 4QD, UK
Tel: +44-(0)-1253-209-600
www.agcce.com

**AGC Chemicals Europe, Ltd.
Commercial Centre**

World Trade Center, Zuidplein 80
1077 XV Amsterdam, Netherlands
Tel: +31-(0)-20-880-41-70
www.agcce.com

AGC Chemicals RUS

Russian Federation, 121596
Moscow, Gorbunova Street 2,
Grand Setun Plaza, Bldg. 204, BC
5th Floor, Block B, Office B 504
Tel: +7-918-555-34-37
www.agcce.com

AGC Vidros do Brasil Ltda.

Al. Ministro Rocha Azevedo, 38,
10º andar, cj 1004
Cerqueira César
São Paulo, SP, Brasil
CEP 01400-000
Tel: +88-11-3373-9981
www.agcchem.com



**Chemistry
for a Blue Planet**
AGC Chemicals

AGC

AGC Chemicals Americas, Inc.

55 E. Uwchlan Avenue, Suite 201
Exton, PA 19341
United States of America

Telephone: +1 610-423-4300
Toll Free (US only): 800-424-7833
Fax: +1 610-423-4305

www.agcchem.com

Visit our website for compliance information and industry certifications.

The information provided herein is related only to the specific product designated and may not be applicable where such product is used in combination with any other materials or in any process.

NO REPRESENTATION OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE, ARE MADE HEREUNDER.

The user of this product has the sole responsibility to determine the suitability of the product for any use and manner of use intended. This document may be revised after its issuance, and the user is advised to use the latest revision.