


AFLAS Fluoroelastomers for Lamination to Other Elastomers

for Automotive Hose Applications

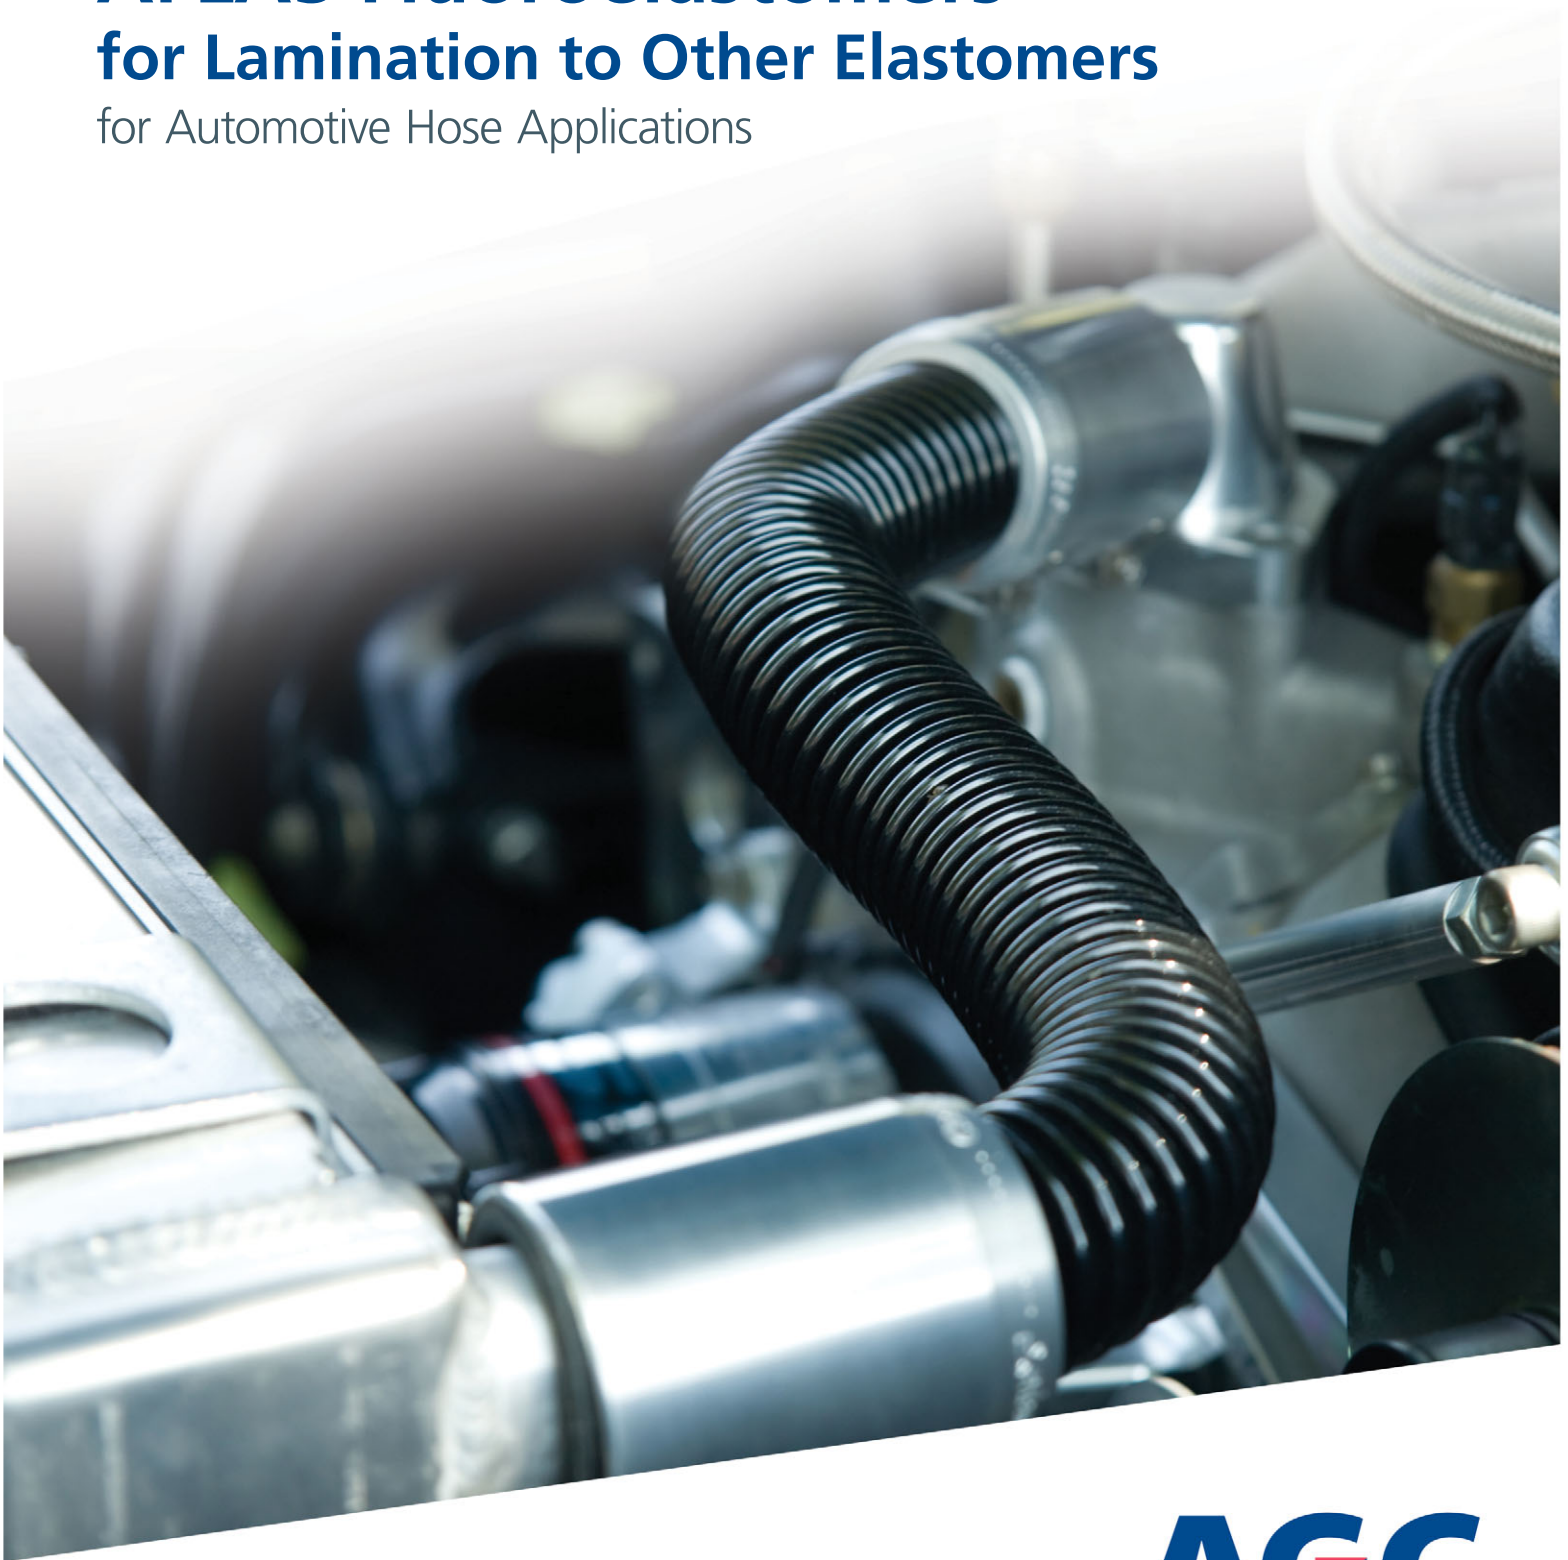

AGC

Your Dreams, Our Challenge

AGC



AGC has developed AFLAS® FEPM grades designed for a new lamination technology for multi-layer hose constructions. This multi-layer technology using AFLAS grades 400E and 600X is ideal for use in high-pressure, high-temperature areas around the engine where hoses are exposed to NOx, SOx, engine oils or other aggressive automotive fluids.


Trends including engine and turbo efficiency improvement, fuel consumption improvement and environmental regulation changes are requiring better equipment and new technology over existing constructions of layered materials such as acrylic rubber (ACM, AEM), silicone rubber (VQM) and FKM.

Benefits of AFLAS 400E and 600X

- Heat, oil, acid and base resistance
- Can be laminated directly to dissimilar elastomers
- Excellent amine and steam resistance
- Continuous use temperatures of 200 °C or higher
- Improved compression set (600X)
- Peel strength of > 7 N/inch at 150 °C
- Rapid cure, colorable, easier processing

AFLAS multi-layer hose technology

- 1 Inner: AFLAS
- 2 Intermediate: AEM, ACM, VMQ, EPDM, or FKM
- 3 Textile reinforcement
- 4 Outer cover

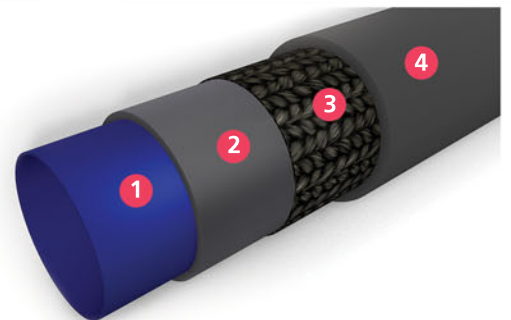


Common Conditions

- High pressure
- High temperature
- Blow-by gas
- NOx, SOx (Organic acid)
- Oil mist of engine oils
- Coolant, ATF
- Hot steam

Applications

- Intercooler hose
- Oil cooler hose
- Oil return hose
- Blow-by hose
- PCV hose
- EGR hose
- Turbo charger hose
- CAC hose
- ATF hose
- Coolant hose

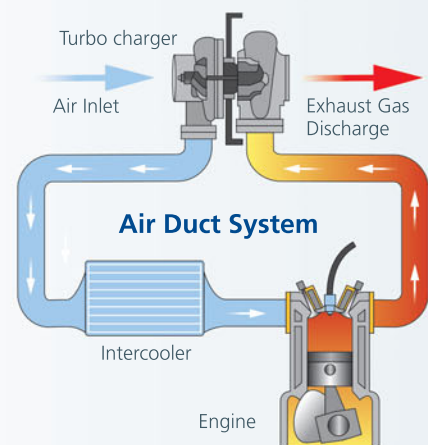


Benefits of AFLAS vs. FKM

Engine oils resistance test in actual conditions and applied GM's standard for testing GMW 15408:


- Turbo charger hoses with high temperature resistance
- Aged engine oils preparation for 72h at 175 °C
- Oils resistance test by immersion in aged engine oils for 168h at 175 °C

0W20

Change in Tensile Strength (%)

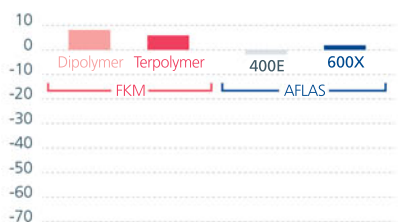


Change in Elongation at Break (%)

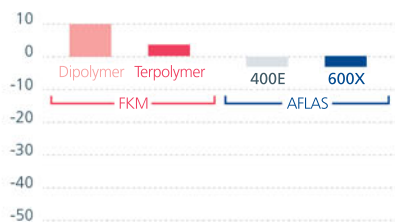


- Notable changes occur with tensile strength and elongation observed with the FKM due to scission substances attacking the polymer
- AFLAS has much higher durability compared to FKM

10W60

Change in Tensile Strength (%)

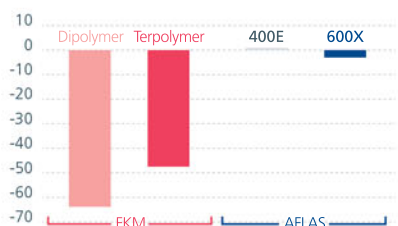

Change in Elongation at Break (%)

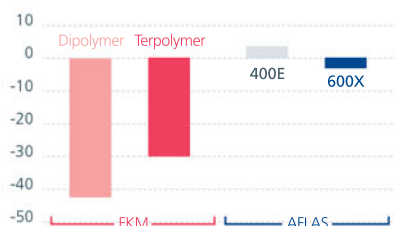

AFLAS Performance in Engine Oil, Fluids and Hot Steam

Product Name	Temp. °C	FKM	AFLAS
Engine Oils	150	Caution	Suitable
Aged Engine Oils	175	Not Applicable	Suitable
AT Fluids	160	Caution	Suitable
Gear Oils	135	Not Applicable	Suitable
Brake Fluids	135	Applicable	Applicable
Coolants 50% LLC	160	Caution	Suitable
Hot Steam	180	Not Applicable	Suitable
Sulfuric Acid	100	Suitable	Not Applicable



**AGC Chemicals Company
AGC Inc.**

Shin-Marunouchi Bldg.
1-5-1 Marunouchi
Chiyoda-ku, Tokyo
100-8405 Japan
Tel: +81-3-3218-5438
www.agc-chemicals.com

AGC Asia Pacific Pte., Ltd.

460 Alexandra Road
#32-01 mTower
Singapore 119963
Tel: +65 6273 5656
www.agc-asiapacific.com

**AGC Chemicals Trading
(Shanghai) Co., Ltd.**

Room 2701-2705, Metro Plaza
555 Lou Shan Guan Road
Chang Ning Ward, Shanghai
China 200051
Tel: +86-21-6386-2211
www.agcsh.com

**AGC Chemicals
(Thailand) Co., Ltd.**

944 Mitrtown Office Tower, 14th Floor
Rama 4 Road, Wangmai Sub-District
Pathumwan District, Bangkok 10330
Thailand
Tel: +66-2-092-6499
www.acth.co.th

AGC Chemicals Europe, Ltd.

Hillhouse International
Fleetwood Road North
Thornton-Cleveleys
FY5 4QD
United Kingdom
Tel: +44 (0) 1253 209560
www.agcce.com

**AGC Chemicals Europe, Ltd.
Commercial Centre**

World Trade Center, Zuidplein 80
1077 XV Amsterdam, Netherlands
Tel: +31-(0)-20-880-41-70
www.agcce.com

AGC Chemicals RUS

Russian Federation, 121596
Moscow, Gorbunova Street 2
Grand Setun Plaza, Bldg. 204, BC
5th Floor, Block B, Office B 504
Tel: +7-918-555-34-37
www.agcce.com

AGC Vidros do Brasil Ltda.

Estrada Municipal Doutor Jaime
Eduardo Ribeiro Pereira, 500
Jardim Vista Alegre
Guaratinguetá, SP, Brasil
CEP 12523-671
Tel: +55-11-3373-9981
www.agcchem.com



**Chemistry
for a Blue Planet**
AGC Chemicals

AGC

AGC Chemicals Americas, Inc.

55 E. Uwchlan Avenue, Suite 201
Exton, PA 19341
United States of America

Telephone: +1 610-423-4300
Toll Free (US only): 800-424-7833
Fax: +1 610-423-4305

www.agcchem.com

Visit our website for compliance information and industry certifications.

The information provided herein is related only to the specific product designated and may not be applicable where such product is used in combination with any other materials or in any process.

NO REPRESENTATION OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE, ARE MADE HEREUNDER.

The user of this product has the sole responsibility to determine the suitability of the product for any use and manner of use intended. This document may be revised after its issuance, and the user is advised to use the latest revision.