

# ASAHIKLIN AE3000



AsahiKlin AE3000 is a fluorinated solvent used for cleaning, drying, and as a carrier solvent. This Hydrofluoroether (HFE-347pc-f) is a nonflammable solvent that has excellent material compatibility, low surface tension, low Global Warming Potential, and Zero ODP.

## Typical Applications

- Precision cleaning of metals, alloys, composites, and plastics
- Carrier solvent for fluorinated oils and greases
- Carrier solvent for silicone oils
- Drying agent after cleaning with hydrocarbons or alcohols
- Particle removal
- Replacement for HCFC, Dupont™ Vertrel®, & 3M™ Novec™ solvents

## Benefits

- Non-flammable
- Non-corrosive
- Superior drying property
- Excellent permeability
- Recyclable
- Low global warming potential (GWP)
- Zero ozone depletion potential (ODP)
- No surfactants necessary
- Recoverable by simple distillation
- Can be used with ultrasonics
- Low surface tension & viscosity
- High liquid density
- Excellent thermal, chemical, and hydrolytic stability


## Physical Properties

Property	AsahiKlin AE3000
Boiling Point	56 °C (132.8 °F)
Melting Point	-94 °C
Density (g/cm <sup>3</sup> , 25 °C)	1.47
Viscosity (cST, 25 °C)	0.44
Surface Tension (dyne/cm, 25 °C)	16.4
Latent Heat of Vaporization (KJ/kg, 39 °C)	163
Relative Evaporation Rate (Ether=100)	67
Flash Point (Open/Closed cup)	None
Vapor Pressure (kg/cm <sup>2</sup> , 25 °C)	32


## Composition

Components	AsahiKlin AE3000
1,1,2,2-tetrafluoroethyl-2,2,2-trifluoroethyl ether	100%


### Density Vs. Temperature

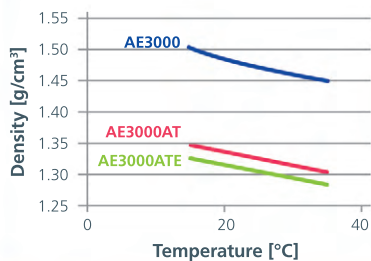

### Vapor Pressure Vs. Temperature

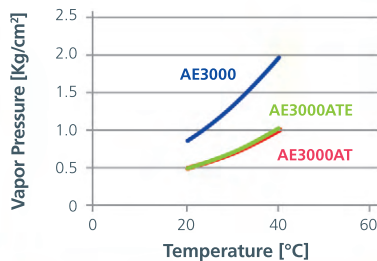

### Viscosity Vs. Temperature

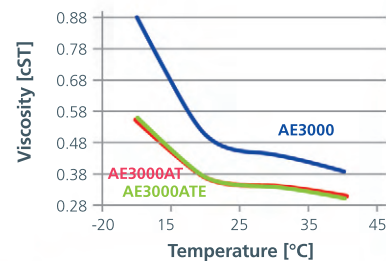

## Cleaning Procedure

It is recommended that AsahiKlin AE3000 be used in a vapor degreaser to optimize cleaning efficiency, economy, and emission control. Cleaning procedures for AsahiKlin AE3000 are quite similar to those of AK225 products. The procedures consist of immersing a workload into the boiling solvent, rinsing or spraying with cool solvent and drying in solvent vapor.

## Material Compatibility

AsahiKlin AE3000 has a broad range of compatibilities.

### Effect of AsahiKlin AE3000 on Unstressed Plastics and Elastomers at the Boiling Point

Material	At boiling for 3 days	
	Weight Change (%)	Linear Swell (%)
Polypropylene	<2.5	<1.0
Polystyrene	<0.1	<0.1
Polymethyl methacrylate	Affected	Affected
ABS	<0.1	<0.1
PTFE	<2.5	<0.1
Fluoroelastomer	>86	>24
Silicon Rubber	<12.5	<2.5
EPDM	<0.1	<0.1

## Environmental Properties

Property	AsahiKlin AE3000
Ozone Depletion Potential (ODP), CFC-11 = 1.0	None
Global Warming Potential (GWP), CO <sub>2</sub> = 1.0, 100yr ITH	580
Flash Point	None

## Environmental Health and Safety

Please read the current product Material Safety Data Sheet (available through your AGCCA technical service representative) and the precautionary statement on the product package prior to use. Follow all applicable precautions and directions.

AsahiKlin AE3000 is nonflammable. The solvent is resistant to thermal breakdown and hydrolysis during storage and use. Recommended handling procedures are provided in the Material Safety Data Sheet, which is available from your AGCCA representative upon request.



**AGC Chemicals Americas, Inc.**  
55 E. Uwchlan Avenue, Suite 201  
Exton, PA 19341  
United States of America

Telephone: +1 610-423-4300  
Toll Free (US only): 800-424-7833  
Fax: +1 610-423-4305

**[www.agcchem.com](http://www.agcchem.com)**

Visit our website for compliance information and industry certifications.

AsahiKlin™ is a registered trademark of AGC, Inc.